


ULTRAFLW®

DATA SHEET

- Cooling flow sensor
- Ultrasonic flow sensor
- Compact design
- Static meter with no moving parts
- Large dynamic range
- No wear
- Exceptionally accurate
- Longevity

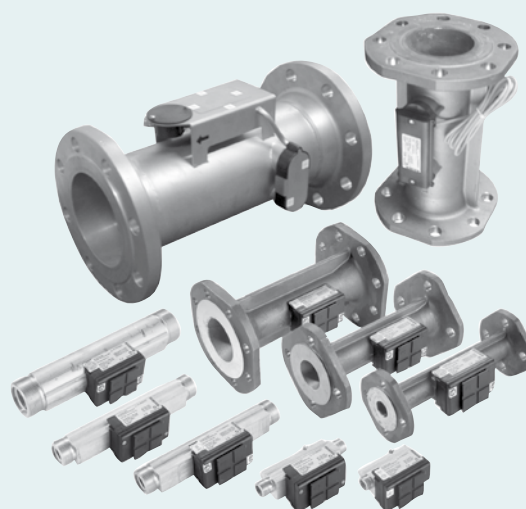

Application

ULTRAFLW® type 65-T is a static flow sensor based on the ultrasonic measuring principle. The prime area of application is as a volume flow sensor for use with thermal heat meters such as MULTICAL®. ULTRAFLW® type 65-T has been designed for use in cooling installations where water is used as the energy-bearing medium.

ULTRAFLW® is not suitable for use with other media than water and should therefore not be used with e.g. non-freezing additives like glycol.

ULTRAFLW® employs micro-processor technology and ultrasonic measuring techniques. All circuits for calculating and measuring are collected on a single board, providing compact and rational design in addition to an

exceptionally high level of measuring accuracy and reliability.

The flow is measured using bidirectional ultrasonic technique based on the transit time method, with proven long-term stability and accuracy. Two ultrasonic transducers are used to send the sound signal both against and with the flow direction.

The ultrasonic signal travelling with the flow direction reaches the opposite transducer first. The time difference between the two signals can be converted to a flow velocity and thus a volume.

A multiplug, placed beneath the seal, is used during communication and calibration.

A three-wire pulse cable is used to connect ULTRAFLW® to the calculator. This cable is used to supply the flow sensor from the calculator and also to send the signal to the calculator. The signal corresponds to the flow, or more correctly, a number of pulses proportional to the water volume flowing through the meter is transmitted.

If required a Pulse Transmitter can be used to supply ULTRAFLW®, e.g. if the distance between MULTICAL® and ULTRAFLW® is 10 m or more.

The Pulse Transmitter has a built-in supply and a galvanically separated pulse outlet.





Contents

Application	1
Approvals	3
Technical data	3
Flow data	4
Materials	4
Materials	5
Type summary	5
Dimension sketches	6
Dimension sketches	7
Dimension sketches	8
Pulse Transmitter	9
Pressure loss	10
Pressure loss graphs	10
Installation	11
Examples of installation	12
Electrical connection	13
Example of connecting ULTRAFLOW® and MULTICAL®	14
Order specification	15
Accessories	16



Approvals

CE-marking

ULTRAFLOW® type 65-T is marked in accordance with:

- EMC-directive 2004/108/EC
- LV-directive 2006/95/EC (together with the Pulse Transmitter)
- PE-directive 97/23/EC (DN50...DN100 category I, DN150...DN250 category II)

Technical data

Mechanical data

Metrological class	2 and 3
Environmental class	Complies with DS/EN 1434 class C
Ambient temperature	0...55°C
Protection class	
– Flow sensor	IP65
– Pulse Transmitter	IP54
Temperature of medium	2...50°C
Storage temp. drained meter	-25...70°C, 60°C with fitted/supplied battery
Pressure stage	PN16, PN25 flange
Time constant	6 s, fast response meter

Electrical data

Supply voltage	3.6 V ± 10%
Battery (Pulse Transmitter)	3.65 VDC, D-Cell lithium
Replacement interval	6 years @ $t_{BAT} < 30^{\circ}\text{C}$
Power supply (Pulse Transmitter)	230 VAC + 15/- 30%, 48...52 Hz 24 VAC ± 30%
Back-up supply	Integral super-cap eliminates operational disturbances due to short-term power-cuts
Cable length, flow sensor	Max. 10 m
Cable length (Pulse Transmitter)	Depends on calculator
EMC data	Complies with DS/EN 1434 class C



Flow data

Nom. flow q_p [m³/h]	Nom. diameter [mm]	Meter factor ¹⁾ [imp./l]	Dynamic range $q_s:q_p$	$q_s:q_p$	Flow @125 Hz ²⁾ [m³/h]	Δp [bar]	Min. cut off [l/h]
1.5	DN15 & DN20	100	1:100	2:1	4.5	0.23	3
3	DN20	50	1:100	2:1	9	0.05	6
3.5	DN25	50	1:100	2:1	9	0.07	7
6	DN25	25	1:100	2:1	18	0.19	12
10	DN40	15	1:100	2:1	30	0.06	20
15	DN50	10	1:100	2:1	45	0.14	30
25	DN65	6	1:100	2:1	75	0.06	50
40	DN80	5	1:100	2:1	90	0.15	80
60	DN100	2.5	1:100	2:1	180	0.01	120
100	DN100	1.5	1:100	2:1	300	0.03	200
150	DN150	1	1:100	2:1	450	0.02	300
250	DN150	0.6	1:100	2:1	750	0.055	500
400	DN150	0.4	1:100	2:1	1125	0.038	800
400	DN200	0.4	1:100	2:1	1125	0.01	800
400	DN250	0.4	1:100	2:1	1125	0.01	800
600	DN200	0.25	1:100	2:1	1800	0.022	1200
600	DN250	0.25	1:100	2:1	1800	0.022	1200
1000	DN250	0.25	1:100	1.8:1	1800	0.015	2000

¹⁾ The meter factor can be seen on the label on the side of the meter.

²⁾ Saturation flow. Max. pulse frequency 128 Hz is maintained at higher flow rates.

Materials

Wetted parts

ULTRAFLOW®, q_p 0.6 and 1.5 m³/h

Housing	Enkotal (alpha brass)
Transducers	AISI 316 (W.no. 1.4401)
Gaskets	EPDM
Reflectors	PES 30% GF and AISI 304 (W.no. 1.4301)
Measuring pipe	PES 30% GF

ULTRAFLOW®, q_p 3 to 100 m³/h

Housing, gland	Enkotal (alpha brass)
Housing, flange	RG5204 (red brass)
Transducers	AISI 316 (W.no. 1.4401)
Gaskets	EPDM
Measuring pipe	PES 30% GF
Reflectors	AISI 304 (W.no. 1.4301)



Materials

ULTRAFLOW®, q_p 150 to 1000 m³/h

Housing	AISI 304 (W.no. 1.4301)
Transducers	AISI 316/Enkotal
Gaskets	EPDM
Measuring pipe	Integral part of the housing

Electronic housing

Base	PBT 30% GF
Lid	PC 10% GF

Connection cable q_p 0.6 to 100 m³/h

Silicone cable (3 x 0.5^{mm})

Type summary

Nom.flow q_p [m³/h]	Size			
1.5	G¾ x 110 mm		G1 x 130 mm	G1 x 190 mm
3	G1 x 190 mm			
3.5	G5/4 x 260 mm			
6	G5/4 x 260 mm	DN25 x 260 mm		
10	G2 x 300 mm	DN40 x 300 mm		
15	DN50 x 270 mm			
25	DN65 x 300 mm			
40	DN80 x 300 mm			
60	DN100 x 360 mm			
100	DN100 x 360 mm			
150	DN150 x 500 mm			
250	DN150 x 500 mm			
400	DN150 x 500 mm	DN200 x 500 mm	DN250 x 600 mm	
600	DN200 x 500 mm	DN250 x 600 mm		
1000	DN250 x 600 mm			


Gland ISO 228-1

Flange EN 1092-1/-3, PN25



Dimension sketches


ULTRAFLOW® type 65-T, G³/₄ and G1

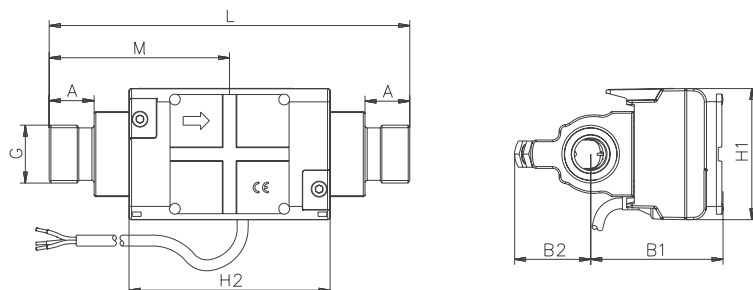

Gland ISO 228-1

Thread	L	M	H2	A	B1	B2	H1	App. weight [kg]
G ³ / ₄	110	L/2	92	10.5	61	35	60	0.8
G1	130	L/2	92	20.5	61	35	60	0.9
G1(q _p 1.5)	190	L/2	92	20.5	61	35	60	1.4
G1(q _p 3.0)	190	L/2	92	20.5	60	36	60	1.3

ULTRAFLOW® type 65-T, G⁵/₄ and G2

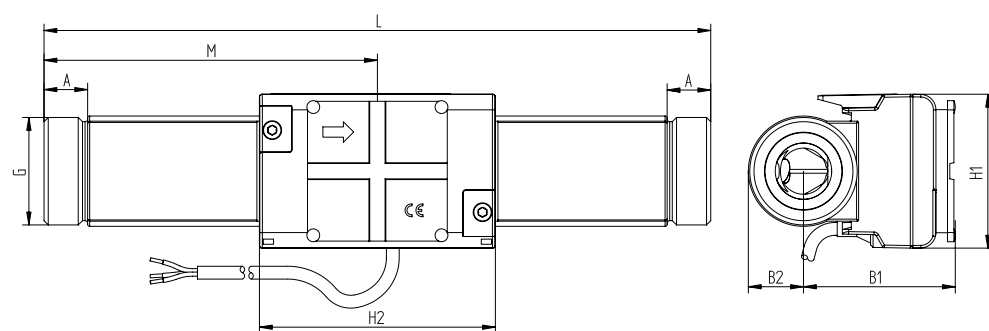


Gland ISO 228-1

Thread	L	M	H2	A	B1	B2	H1	App. weight [kg]
G ⁵ / ₄	260	L/2	92	17	60	22	60	2.3
G2	300	L/2	92	21	68	31	60	4.5



Dimension sketches


ULTRAFLOW® type 65-T, DN20 to DN50

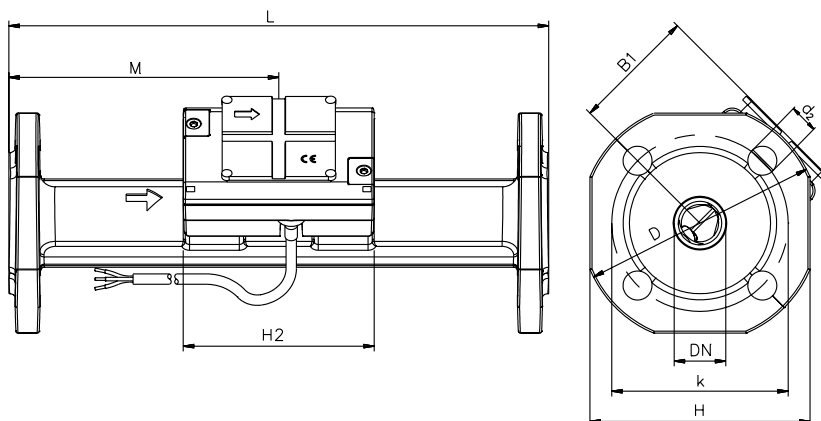

Flange EN 1092-3, PN25

Nom. diameter	L	M	H2	B1	D	H	k	Bolts			App. weight [kg]
								No.	Thread	d ₂	
DN25	260	L/2	92	60	115	106	85	4	M12	14	5.0
DN40	300	L/2	92	<D/2	150	136	110	4	M16	18	8.3
DN50	270	155	92	<D/2	165	145	125	4	M16	18	10.1

ULTRAFLOW® type 65-T, DN65 and DN80

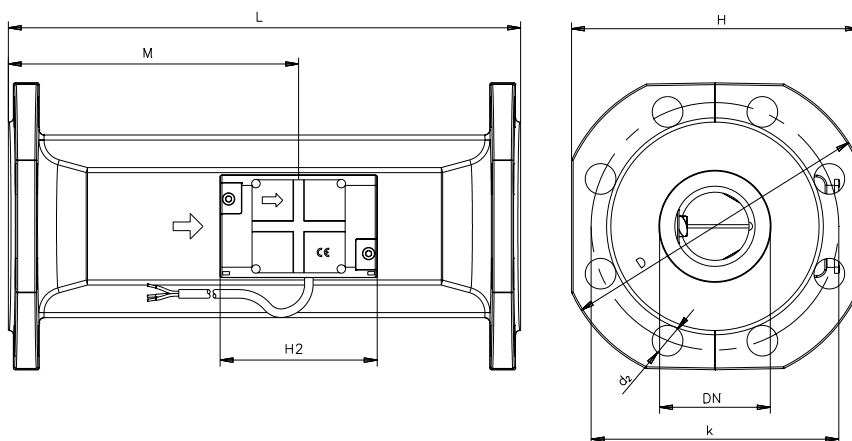


Flange EN 1092-3, PN25

Nom. diameter	L	M	H2	B1	D	H	k	Bolts			App. weight [kg]
								No.	Thread	d ₂	
DN65	300	170	92	<H/2	185	168	145	8	M16	18	13.2
DN80	300	170	92	<H/2	200	184	160	8	M16	18	16.8



Dimension sketches


ULTRAFLOW® type 65-T, DN100

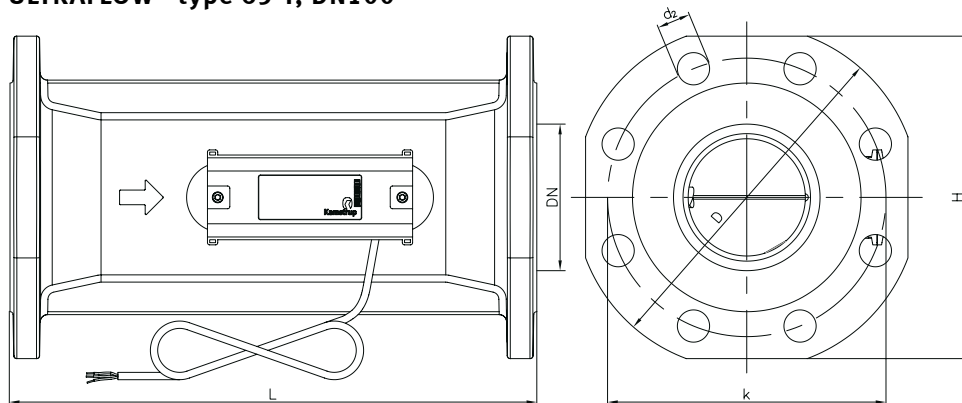

Flange EN 1092-3, PN25


Nom. diameter	L	D	H	k	Bolts			App. weight [kg]
					No.	Thread	d ₂	
DN100	360	235	220	190	8	M20	22	25.6

ULTRAFLOW® type 65-T, DN150 to DN250

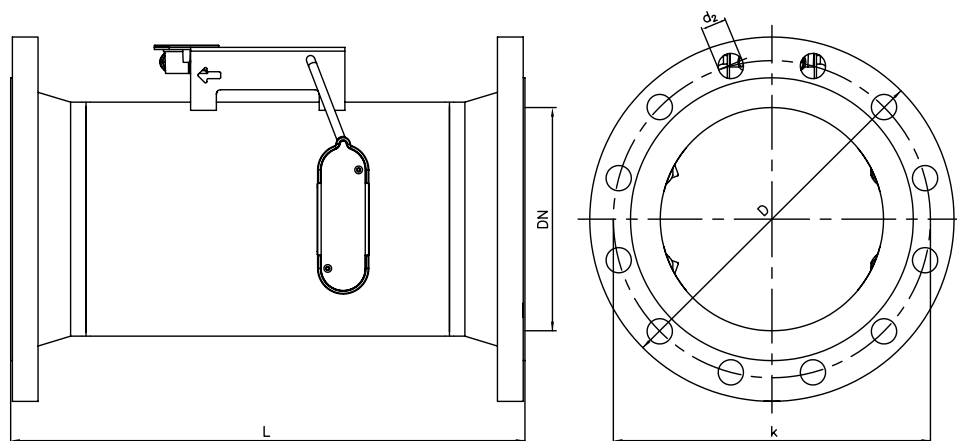


Flange EN 1092-1, PN25

Nom. diameter	L	D	k	No.	Bolts		App. weight [kg]
					Thread	d ₂	
DN150	500	300	250	8	M24	26	37
DN150 (q _p 400 m ³ /h)	500	300	250	8	M24	26	32
DN200	500	360	310	12	M24	26	47
DN250	600	425	370	12	M27	29.5	68
DN250 (q _p 1000 m ³ /h)	600	425	370	12	M27	29.5	65



Pulse Transmitter

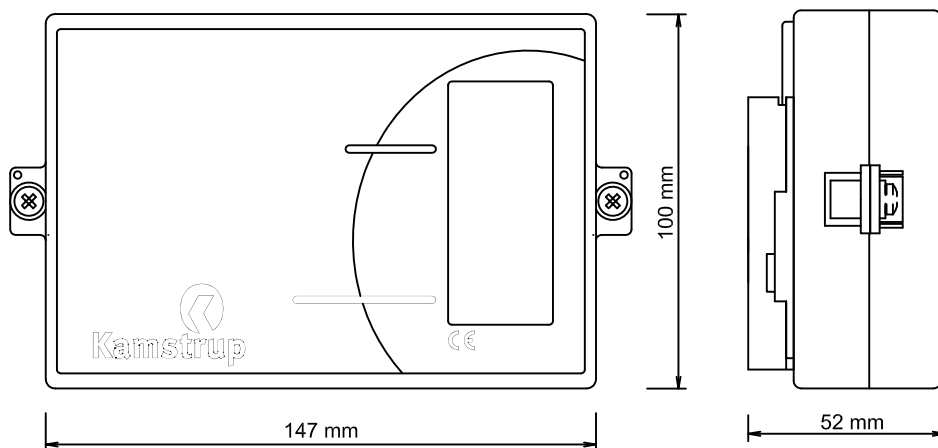




Pressure loss

Graph	q_p [m³/h]	Nom. diameter	k_v ³⁾	Q@0.25 bar [m³/h]
A	1.5	DN15 & DN20	3	1.5
B	3 & 3.5 & 6	DN20 & DN25	13.5	6.8
C	10 & 15	DN40 & DN50	43	21.5
D	25 & 40	DN65 & DN80	103	52
E	60 & 100	DN100	600	300
F	150 & 250	DN150	1060	530
G	400	DN150	2050	1025
H	400 & 600	DN200 & DN250	4040	2020
J	1000	DN250	8160	4080

³⁾ $q = k_v \times \sqrt{\Delta p}$


Pressure loss graphs

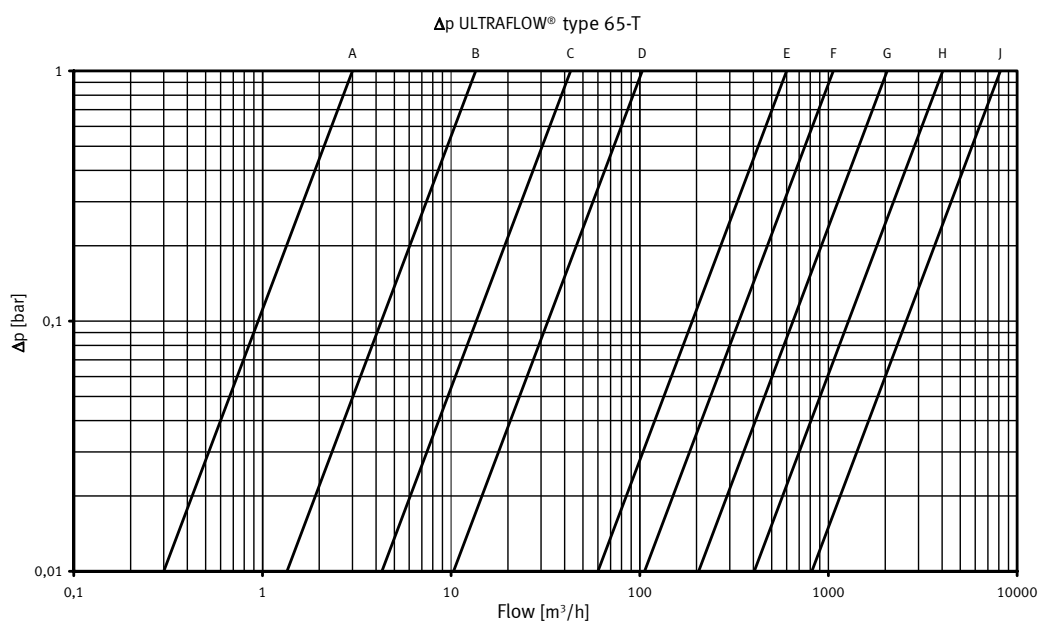



Installation

ULTRAFLOW® ≤ DN100

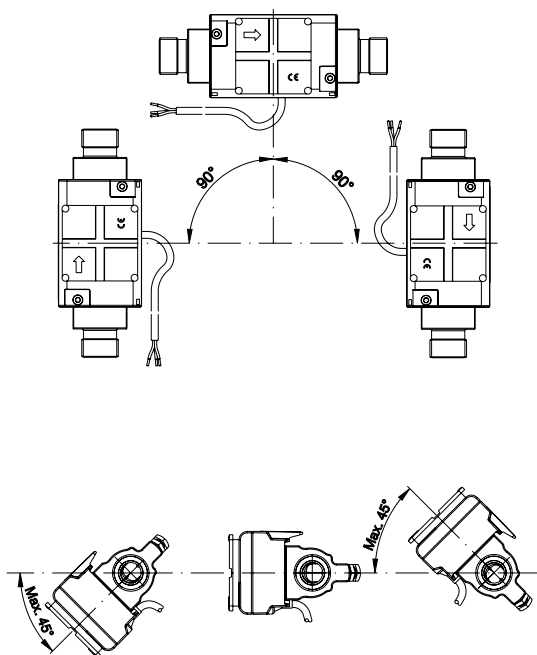

ULTRAFLOW® may be installed horizontally, vertically or at an angle.

IMPORTANT!


With ULTRAFLOW® ≤ DN100 (100 m³/h), the electronics/ plastic case must be placed to the side (with horizontal installation).

ULTRAFLOW® may be turned up to ± 45° in relation to the pipe axis.

Straight inlet (UF 65-T)

ULTRAFLOW® requires neither straight inlet nor outlet to meet the Measuring Instruments Directive (MID) 2004/22/EC, OIML R75:2002 and EN 1434:2007. Only in case of heavy flow disturbances before the meter will a straight inlet section be necessary. We recommend to follow the guidelines in CEN CR 13582.

ULTRAFLOW® ≥ DN150

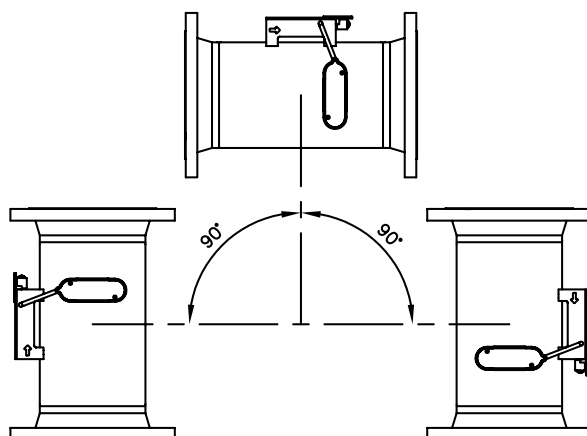

ULTRAFLOW® may be installed horizontally, vertically or at an angle.

IMPORTANT!

With ULTRAFLOW® ≥ DN150 (150 m³/h), the electronics/ plastic case must be placed upwards (with horizontal installation).

ULTRAFLOW® may be turned up to ± 45° in relation to the pipe axis.

Working Pressure


In order to prevent cavitation the working pressure at ULTRAFLOW® must be min. 1.5 bar at q_p and min. 2.5 bar at q_s (4.5 bar for DN80). This applies to temperatures up to approx. 80°C.

ULTRAFLOW® must not be exposed to lower pressure than the ambient pressure (vacuum).




Examples of installation


Gland meter with MULTICAL®/Pulse Transmitter fitted directly on ULTRAFLOW®.

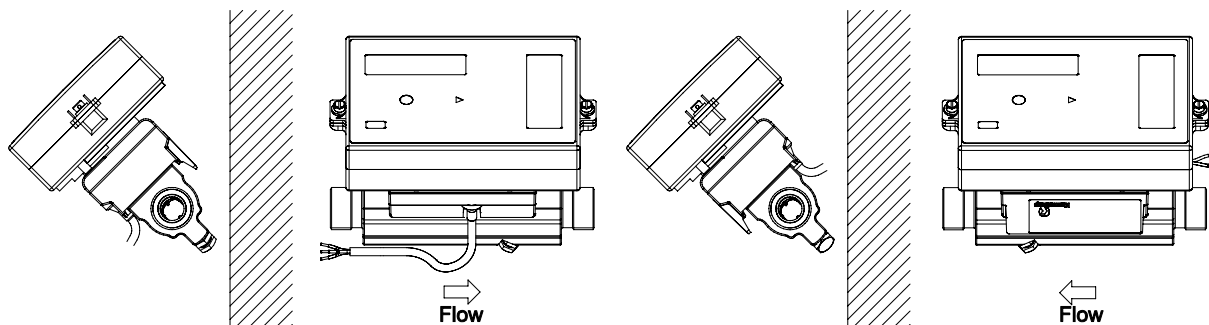

Glands and short direct sensor fitted in ULTRAFLOW® (G $\frac{3}{4}$ (R $\frac{1}{2}$) and G1 (R $\frac{3}{4}$) only).

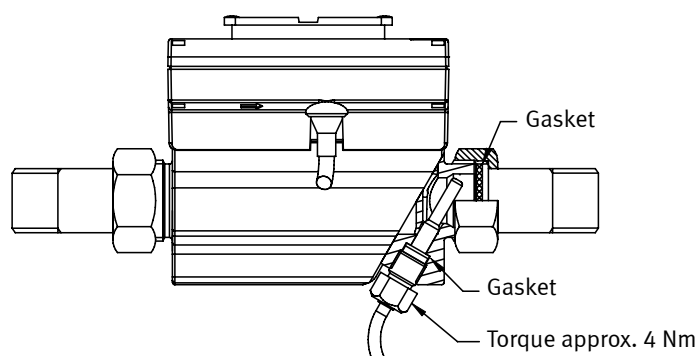

Flange meter with MULTICAL®/Pulse Transmitter fitted directly on ULTRAFLOW®.

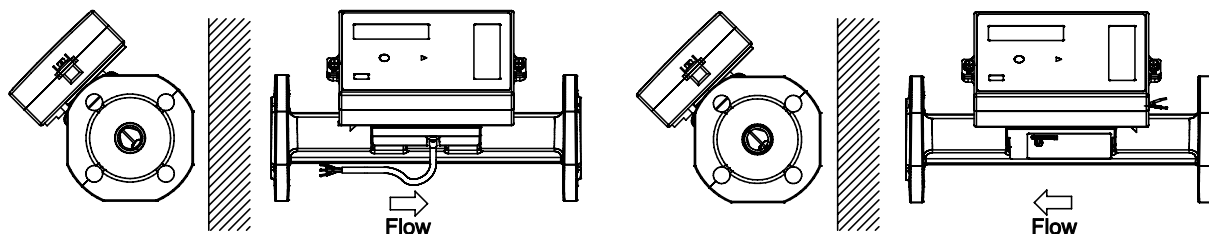

NB: For meters $\geq$ DN100 MULTICAL® or the Pulse Transmitter cannot be fitted directly on the flow part.



Electrical connection

Connecting MULTICAL® & ULTRAFLOW®

ULTRAFLOW® 54	->	MULTICAL®
Blue (GND)/11A	->	11
Red (supply)/9A	->	9
Yellow (signal)/10A	->	10

Connecting via Pulse Transmitter

3.65 VDC supply ⁴⁾	->	Pulse Transmitter
Red (+)	->	60
Black (-)	->	61

⁴⁾ From battery or supply module.


ULTRAFLOW® 54	->	Pulse Transmitter		->	MULTICAL®
		In	Out		
Blue (GND)/11A	->	11	11A	->	11
Red (supply)/9A	->	9	9A	->	9
Yellow (signal)/10A	->	10	10A	->	10

If long signal cables are used, please consider the installation carefully. There must be at least 25 cm between the signal cable and all other cables due to EMC.




Example of connecting ULTRAFLOW® and MULTICAL®

ULTRAFLOW® type 65-T, $q_p \leq 100 \text{ m}^3/\text{h}$

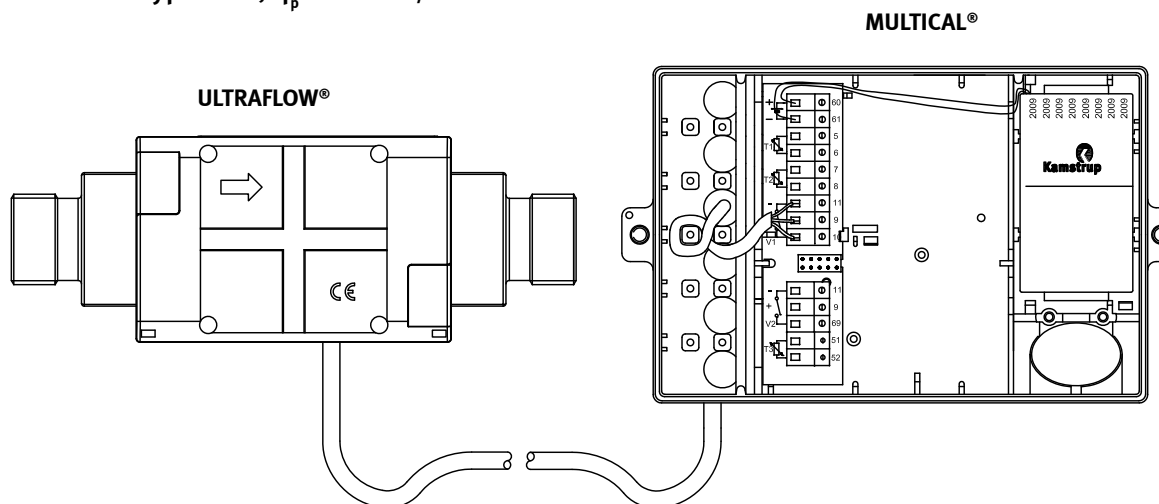

ULTRAFLOW® type 65-T with terminal, $q_p \geq 150 \text{ m}^3/\text{h}$

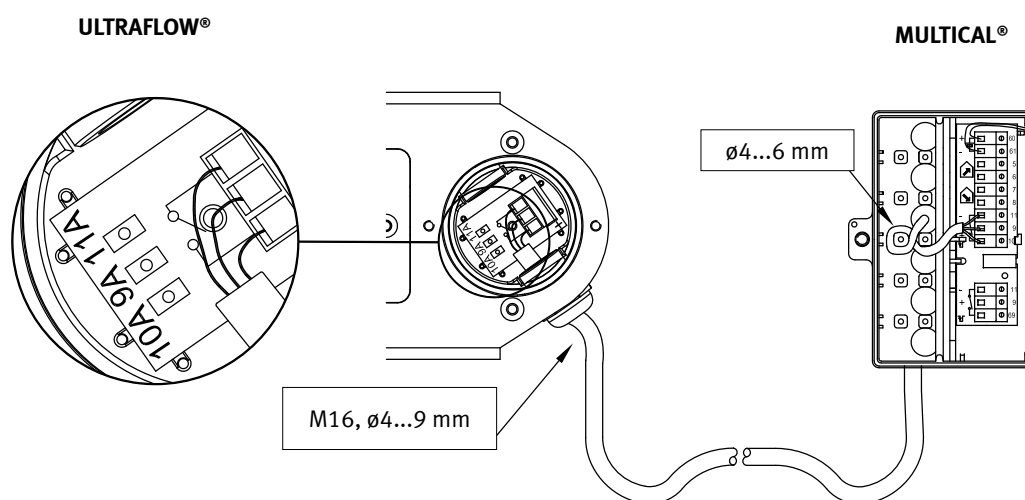

If there is a risk of condensation, the connection box must be secured against condensation after installation.



Order specification

The list below shows type numbers for ULTRAFLOW® type 65-T.

Type number ⁵⁾	q_p [m³/h]	q_l [m³/h]	q_s [m³/h]	Connection	Length [mm]	Meter factor [pulses/l]	CCC
65-T- CDAA -XXX	1.5	0.015	3.0	G¾B (R½)	110	100	119 or 107
65-T- CDAD -XXX	1.5	0.015	3.0	G1B (R¾)	130	100	119 or 107
65-T- CDAF -XXX	1.5	0.015	3.0	G1B (R¾)	190	100	119 or 107
65-T- CFAF -XXX	3.0	0.03	6.0	G1B (R¾)	190	50	136
65-T- CGAG -XXX	3.5	0.035	7.0	G5/4B (R1)	260	50	151 or 136
65-T- CHAG -XXX)	6.0	0.06	12	G5/4B (R1)	260	25	137 or 138
65-T- CHBB -XXX	6.0	0.06	12	DN25	260	25	137 or 138
65-T- CJAJ -XXX	10	0.1	20	G2B (R1½)	300	15	178 or 183
65-T- CJBD -XXX	10	0.1	20	DN40	300	15	178 or 183
65-T- CKBE -XXX	15	0.15	30	DN50	270	10	120 or 185
65-T- CLBG -XXX	25	0.25	50	DN65	300	6	179
65-T- CMBH -XXX	40	0.4	80	DN80	300	5	158 or 186
65-T- FACL -XXX	60	0.6	120	DN100	360	2.5	170 or 187
65-T- FBCL -XXX	100	1.0	200	DN100	360	1.5	180 or 188
65-T- FCCN -XXX	150	1.5	300	DN150	500	1	147 or 189
65-T- FDCN -XXX	250	2.5	500	DN150	500	0.6	181
65-T- FECN -XXX	400	4.0	800	DN150	500	0.4	171 or 191
65-T- FECF -XXX	400	4.0	800	DN200	500	0.4	171 or 191
65-T- FECP -XXX	400	4.0	800	DN250	600	0.4	171 or 191
65-T- FFCF -XXX	600	6.0	1200	DN200	500	0.25	172 or 192
65-T- FFCE -XXX	600	6.0	1200	DN250	600	0.25	172 or 192
65-T- F1CE -XXX	1000	10.0	1800	DN250	600	0.25	172 or 192

⁵⁾ XXX-code pertaining to final assembly, approvals etc. is determined by Kamstrup A/S.

Some variants may not be included in national approvals.

ULTRAFLOW® type 65-T ≤ DN100 is as standard supplied with 2.5 m cable, but can also be supplied with 5 or 10 m cable.

ULTRAFLOW® ≥ DN150 is supplied without cable. A 5 m or 10 m cable can be ordered and delivered, separately.

Pulse Transmitter - type No. 66-99-603

The Pulse Transmitter is supplied with built in supply for ULTRAFLOW®. Battery, 24 VAC and 230 VAC supply are available. Please state the required supply type when ordering.



Accessories

Glands including gaskets (PN16)

Size	Type No.	2 pcs.
DN15, (R $\frac{1}{2}$ x G $\frac{3}{4}$)	-	65-61-321
DN20, (R $\frac{3}{4}$ x G1)	-	65-61-322
DN25, (R1 x G $\frac{5}{4}$)	65-61-313	-
DN40, (R1 $\frac{1}{2}$ x G2)	65-61-315	-

Gaskets for flange meters

Size	Type No.
DN25	2210-133
DN40	2210-132
DN50	2210-099
DN65	2210-141
DN80	2210-140
DN100	1150-142
DN150	1150-140
DN200	1150-139
DN250	1150-141

Gaskets for glands

Size	Type No.
G $\frac{3}{4}$	2210-061
G1	2210-062
G $\frac{5}{4}$	2210-063
G2	2210-065