



COMPANY
MANAGEMENT SYSTEM
CERTIFIED BY DNV
= ISO 9001 =
= ISO 14001 =



ISO 4064

Multi-jet warm water meter,
with dry dial counter

BETA

BETA SDC


Multi-jet warm water meter, with dry dial counter

PERFORMANCE ACCORDING TO ISO 4064 DIRECTIVE


SIZE		PERMANENT FLOW	MAXIMUM FLOW	TRANSITIONAL FLOW	MINIMUM FLOW	WORKING PRESSURE	MINIMUM READING	MAXIMUM READING	TEMPERATURE CLASS
(mm)	(inch)	Q_3 (m ³ /h)	Q_4 (m ³ /h)	Q_2 (l/h)	Q_1 (l/h)	(bar)	(l)	(m ³)	
13/15	1/2"	2,5	3,125	50,0	31,3	16	0,05	99.999	T90
20	3/4"	4,0	5,000	80,0	50,0	16	0,05	99.999	T90
25	1"	6,3	7,875	126,0	78,8	16	0,05	99.999	T90
30	1"1/4	10,0	12,500	200,0	125,0	16	0,05	99.999	T90
40	1"1/2	16,0	20,000	320,0	200,0	16	0,5	999.999	T90
50	2"	25,0	31,250	500,0	312,5	16	0,5	999.999	T90

Metrological class (Q_3/Q_1) R = 80

TYPICAL ERROR CURVE

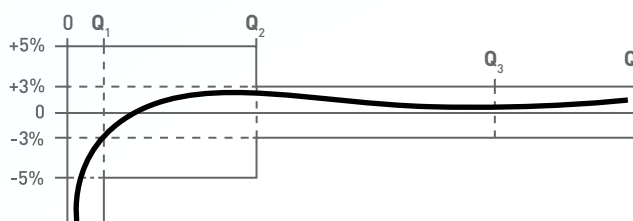


PRESSURE LOSS DIAGRAM

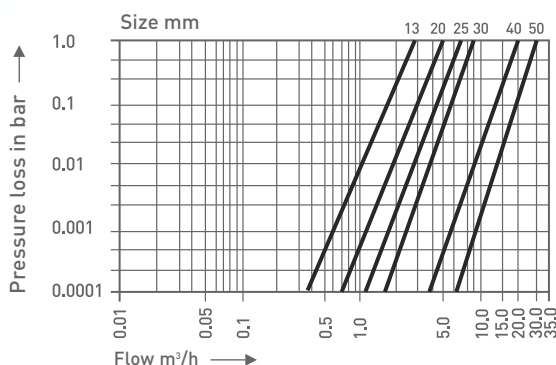

DIMENSIONS

{mm} SIZE {inch}	13/15	20	25	30	40	50 *
L (mm)	110 - 145 165 - 170	160 190	160 260	160 260	200 - 300	300
H (mm)	105	110	115	120	150	180 fil 190 fla
TOTAL LENGTH OF CONNECTORS (mm)	80	100	100	120	140	160



** non return valve on request

* body in cast iron, available also in flanged version.

For additional information and options, do not hesitate to contact us.

WATERTECH S.P.A. - Water meters

Factory, commercial main office and administration:

Str. Antica Fornace, 2/4 • 14053 Canelli (AT) - Italy

Tel +39 0141 822106-832151 • Fax +39 0141 832191-832198

Mail info@wtmeters.it • Web www.wtmeters.it

Commercial branch office:

Via del Gomito, 23 • 40127 Bologna - Italy

Tel +39 051 326854 • Fax +39 051 328085

Mail info@wtmeters.it • Web www.wtmeters.it